

ABS Ceiling-wall Mounting Speaker

MAIN FEATURES

- 2-way loudspeaker configuration
- 5.5" fullrange driver
- 100V multitap line transformer (10/5/2.5W)
- Horizontal o vertical installing
- Hidden screws mounting type
- High sensitivity level

DESCRIPTION

This surface-mounting series offers a quick and easy installation procedure, saving time and costs. Their ideal application range vary from office to educational buildings where clear announcements and occasional background music is needed. WCS 650 is equipped with a 10W 6,5" fullrange driver housed in a ABS cabinet.



TECHNICAL SPECIFICATIONS


GENERAL		
Code	White	29419
Configuration	way	1
Fullrange driver	inch	5.5

ACOUSTIC SPECIFICATIONS		
Frequency response	Hz	100 - 15k
Sensitivity	dB	91
MAX SPL (100V/6W)	dB	98
Line input	V	100

AMPLIFIER		
Power handling	W	6
Transformer taps	W	6 / 3

MECHANICAL SPECIFICATIONS		
Material	Cabinet	ABS
	Grille	Power-coated iron
Net dimensions (WxHxD)	mm	210 x 312 x 85
	inch	8.26 x 12.28 x 3.34
Net weight	kg	1.25
	lb	2.75

DIMENSIONAL DRAWING

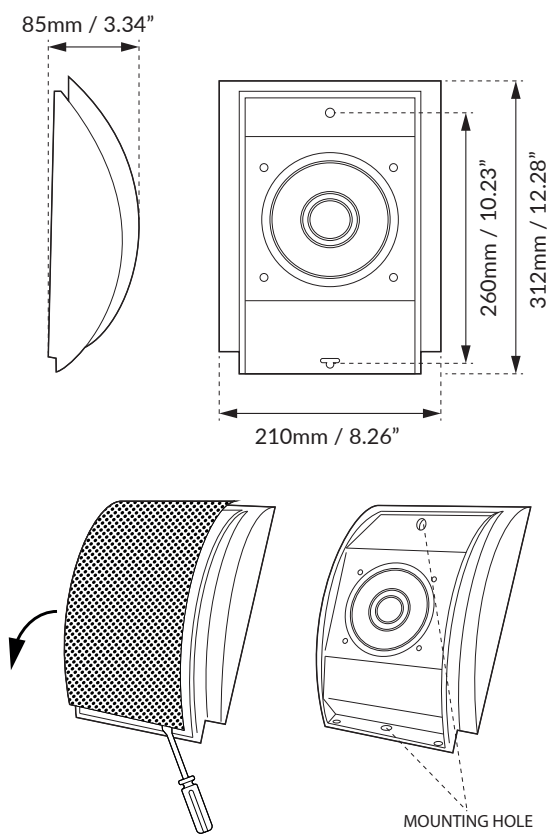

FREQUENCY RESPONSE DIAGRAMS

