

# Passive Sound Reinforcement

## MAIN APPLICATIONS

- Bars, pubs & clubs
- Restaurants
- Retail shops
- Entertainment venues
- Fitness centres
- Exhibition centres
- Conference rooms
- Theatres
- Houses of worship

## MAIN FEATURES

- 2-way passive sound reinforcement system
- 0.59" baltic birch plywood cabinet
- 1 x 15" custom custom designed high excursion LF woofer
- 1 x 2" custom designed HF compression driver
- Rotatable horn
- 500W cont. pink noise / 1000W cont. program / 2000W peak
- Full-range / Bi-amp crossover networks with protection
- Optional line transformer (300W)
- 12 x M10 threaded rigging points
- 1 x 4 Euroblock terminal speaker connector / 2 x Neutrik NL-4 speakon
- Choice of different RAL paint colours and different paint finish
- Completely manufactured in Italy

## DESCRIPTION

The loudspeaker shall consist of a 15" low-frequency transducer and a 2" HF dome tweeter; the low-frequency driver's voice coil shall be 3" in diameter. The loudspeaker shall be set up in full-range mode or bi-amp mode. Performance specifications of a typical unit shall be as follows: usable frequency response shall extend from 48Hz to 18kHz; nominal impedance shall be 8 ohms; the frequency dividing network shall have a crossover frequency of 1.3kHz; measured sensitivity shall be at least 100dB (at 1m [3.3ft]). The input shall be switchable for use either at nominal 8 ohms or on a 100V distributed speaker line via transformer (optional). The HF driver shall be horn-loaded to cover 60 degrees horizontal by 40 degrees vertical (rotatable horn). The cabinet shall be constructed of 0.59" baltic birch plywood covered in a scratch- and scuff-resistant black or white finish. The enclosure shall be fitted with threaded inserts to allow for a variety of mounting methods.

## TECHNICAL SPECIFICATIONS

### GENERAL

Code		36255
Configuration	way	2
Low frequency woofer	inch	15 - 3 coil
High frequency driver	inch	2 - 2.5 coil

### ACOUSTIC SPECIFICATIONS

Frequency response (@-6dB)		48 - 18k
MAX SPL (cont/peak) (bi-amp)*	dB	130 / 134
Dispersion	H° x V°	60 x 40
Sensitivity (@1W/1mt)	dB	100
Crossover frequency	Hz	1.3k
Recommended HP filter	Hz - dB oct	35 - 24
Recommended ext. filter		Digital / preset

### INPUTS & OUTPUTS

Connectors		4-pin Euroblock / 2 x Speakon
------------	--	-------------------------------

\* CONT. SPL: free space, based on recommended amp rating and LF transducer average sensitivity data, 125ms time average  
 PEAK SPL: free space, based on short term applicable power rating and system peak sensitivity, 10ms time average

### AMPLIFIER


Recommended amplifier	W RMS	1000
Transformer (optional)	V / W	100 / 300
Long term power	W	500
Short term power (IEC 268-5)	W	2000
Nominal impedance	Ohm	8

### MECHANICAL SPECIFICATIONS


Material	Cabinet	0.59" baltic birch plywood
	Grille	Steel
Net dimensions (WxHxD)	mm	435 x 740 x 421
	inch	17.12 x 29.13 x 16.57
Transport dimensions (WxHxD)	mm	600 x 845 x 520
	inch	23.62 x 33.27 x 20.47
Net weight	kg	33.20
	lb	73.19
Transport weight	kg	36.50
	lb	80.46



DIMENSIONAL DRAWING

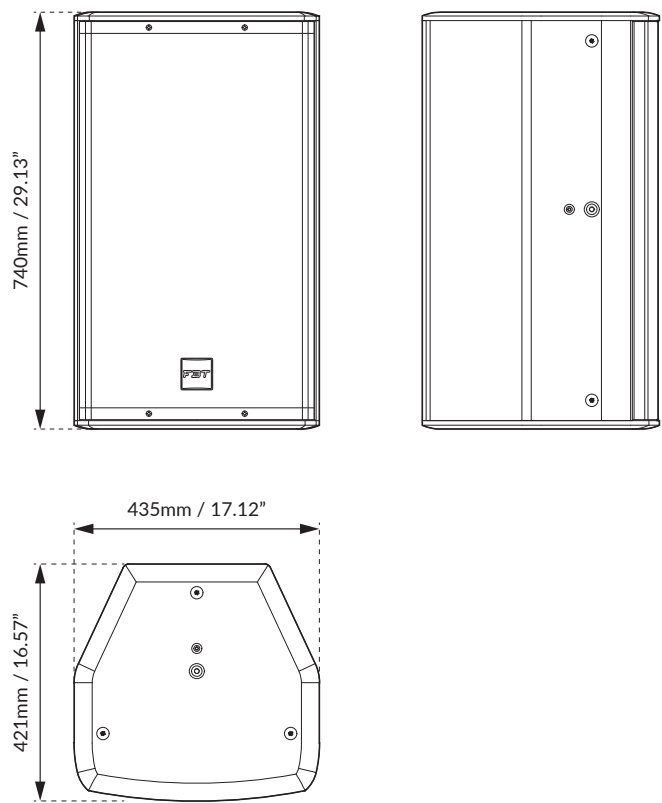

CONTROL PANEL


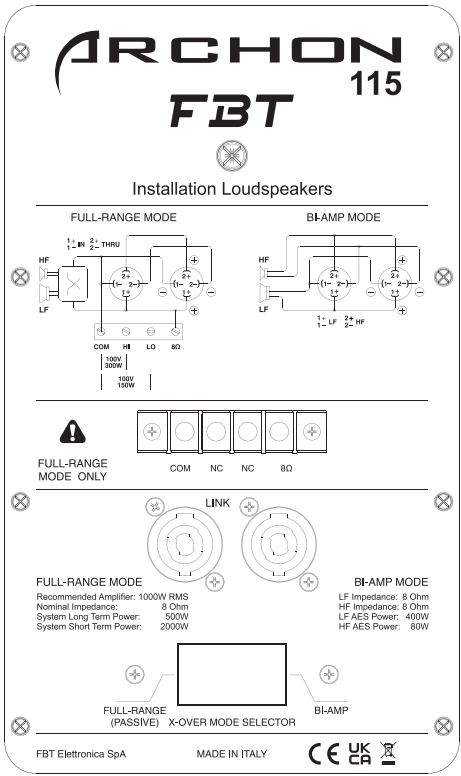


	FULL-RANGE	BI-AMP (LF)	BI-AMP (HF)
* Power	500W 8Ω	400W 8Ω	80W 8Ω
X-over freq. 24dB oct	---	HPF 35Hz LPF 1.3kHz	HPF 1.3kHz

The table shows the power outputs, measured in accordance with the AES standard, that are acceptable by the loudspeaker in FULL-RANGE mode or by the individual drivers in BI-AMP mode.

\*2 hours, pink noise with crest factor 2, applied RMS voltage corresponding to the impedance of the speaker in full-range mode, or of the driver in bi-amp mode.

ACCESSORIES

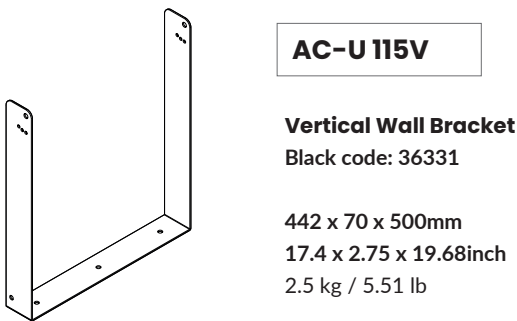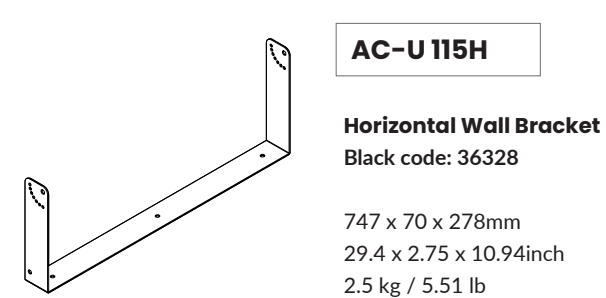

## DIAGRAMS

