

# Passive Reinforcement Speaker

## MAIN APPLICATIONS

- Band P.A.
- Personal monitor
- Small theatres & Auditoriums
- Piano bar
- DJ
- Stage monitor
- Conference rooms
- Fixed installations in live clubs
- Pubs
- Gyms

## MAIN FEATURES

- 2-way passive sound reinforcement speaker
- 300W RMS recommended amplifier
- 0.59" birch plywood scratch resistant enclosure
- Rotatable horn
- Built-in passive crossover
- Control panel features 2 x Speakon NL4 In & Link
- Completely manufactured in Italy



## DESCRIPTION

The FBT VENTIS 110 has been designed to meet the highest standards in both performance and aesthetic appeal. The FBT VENTIS are as suitable for fixed installation, portable use, as they are for use on the stage. The FBT VENTIS 110 incorporating a 10" LF woofer with 2" voice coil, custom made for FBT and 1" exit throat B&C HF compression driver with 1.4" voice coil; a fully rotatable constant directivity horn ensure accurate coverage (80° H x 50° V). With a frequency range from 60Hz to 18kHz the FBT VENTIS 110 speaker provide high fidelity sound for both speech and music applications with a MAX SPL of 127dB. Ideal for small fixed installations the FBT VENTIS 110 speaker system have an impedance of 8Ω and the internal crossover is at a fixed frequency of 1.8kHz. Constructed in 0.59" birch plywood, the FBT VENTIS 110 has one aluminium handle. Rear panel connections features 2 x Neutrik Speakon NL4. The optional mounting bracket allow the FBT VENTIS 110 speaker to be surface mounted on walls or ceilings.

## TECHNICAL SPECIFICATIONS

### GENERAL

Code		40682
Configuration	way	2
Low frequency woofer	inch	10 - 2 coil
High frequency driver	inch	1 - 1.4 coil

### ACOUSTIC SPECIFICATIONS

Frequency response (@-6dB)	Hz	60 - 18k
Sensitivity (@1W/1m)	dB	97
MAX SPL peak**	dB	122 / 127
Dispersion	H° x V°	80 x 50 rotatable
Recommended HP filter	Hz - 24 oct	50 - 24
Crossover frequency	Hz	1.8k

### INPUTS & OUTPUTS

Input connectors		2 x Neutrik speakon NL4
------------------	--	-------------------------

### AMPLIFIER

Recommended amplifier	W RMS	300
Long term power*	W	150
Short term power (IEC 268-5)	W	600
Nominal impedance	Ohm	8


### MECHANICAL SPECIFICATIONS

Material		0.59" birch plywood
Net dimensions (WxHxD)	mm	329 x 575 x 325
	inch	13 x 22.63 x 12.8
Transport dimensions (WxHxD)	mm	440 x 675 x 400
	inch	17.32 x 26.57 x 15.75
Net weight	kg	15.20
	lb	33.51
Transport weight	kg	17.20
	lb	37.91


\* 100 hour power test, IEC-268-5 standard (display the long term RMS voltage handling, using IEC filtered 6dB crest factor pink noise).

\*\*Based on peak level of 6dB crest factor random noise signal used for test.


## DIMENSIONAL DRAWING

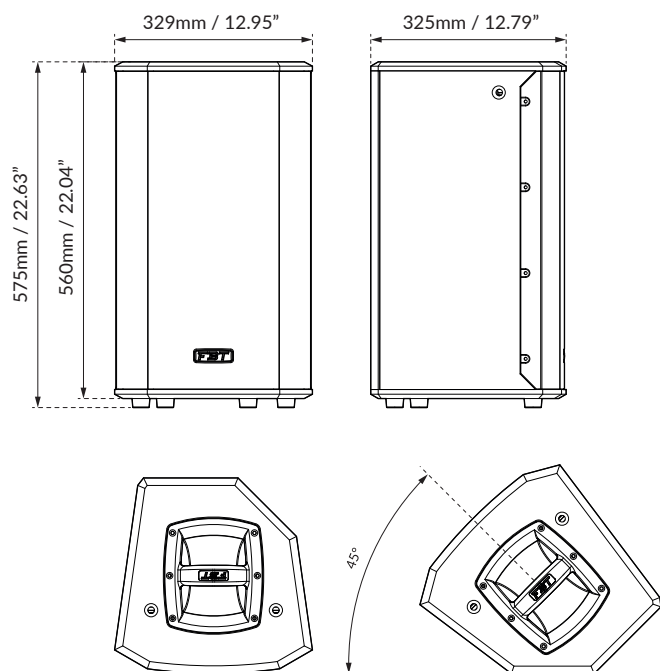

## CONTROL PANEL

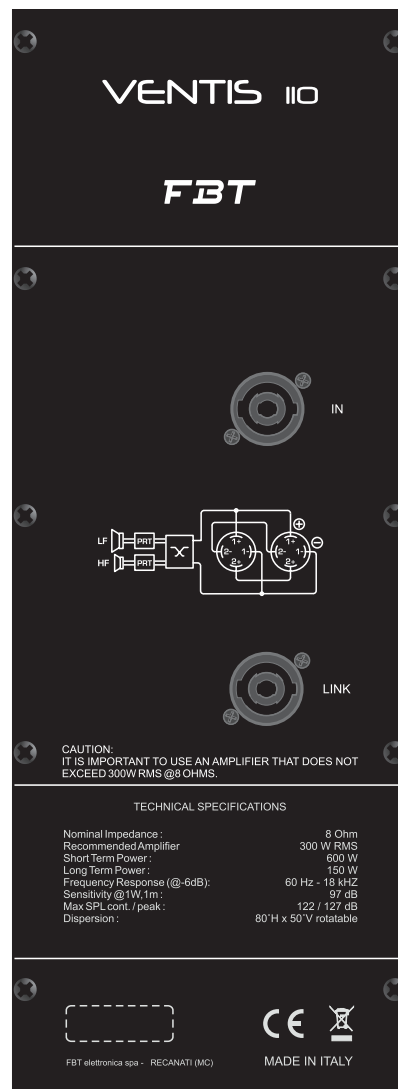

## ACCESSORIES



### VN-U 110

**Wall Metal Bracket**  
Code: 40726

564 x 70 x 249mm  
22.20 x 2.75 x 9.8inch  
2.50 kg / 5.51 lb

## NOTE

**⚠ WARNING |** This FBT loudspeaker should be suspended overhead only in accordance with the procedures and limitations specified in the user's manual. This system should be suspended in compliance with local and state overhead suspension ordinances. The VENTIS speakers use only with FBT mount for wall installation.