

Processed Active Speaker

MAIN APPLICATIONS

- Band P.A.
- Personal monitor
- Small theatres & auditoriums
- Piano bar, DJ & pubs
- Stage monitor
- Conference rooms
- Fixed installations in live clubs
- Gyms

MAIN FEATURES

- 2-way bi-amplified system in bass reflex
- Plywood cabinet
- Woofer custom 15" (LF) woofer / 2.5" voice coil
- 1" throat / 1.4" voice coil HF compression driver
- 1200/300W built-in amplifier max (LF/HF)
- Bluetooth 5.0, 3-channels mixer, 4 DSP presets
- 80° H x 50° V rotatable constant directivity horn
- 35° or 45° monitor taper
- Universal switching mode power supply 100-240Vac
- M10 rigging points

DESCRIPTION

The X PRO 115A series speakers with integrated 3-channels mixer feature lightweight, yet rugged gas injected molded plywood cabinet construction. Available in black finish, the X PRO 115A series speakers provide fixed installations with an elegant design that blends into any decor. The asymmetrical shape of the X PRO 115A cabinet also allows use as a powered floor stage monitor. The X PRO 115A is two way design incorporating a 15" low frequency woofer and 1" HF compression driver coupled to a 80°H x 50°V rotatable constant directivity horn. With a frequency range of 42Hz - 20kHz the X PRO 115A speaker provide high fidelity sound for both speech and music applications with a maximum SPL of 130dB. The bi-amplified X PRO 115A active speaker feature a 1200W low frequency amp and a 300W high frequency amp. The control panel features a three-channel mixer with two micro-line inputs, a stereo input and a dedicated channel for bluetooth 5.0; two xlr inputs, stereo input, xlr output with ch1 or mix link selector, hp filter, two mic-line selectors, dsp preset selector, bluetooth 5.0 with pairing led. 4 x M10 rigging points built-in into the cabinet along with the optional mounting brackets allow the X PRO 115A speaker to be surface mounted on walls or ceilings. A standard 1.38" speaker stand socket allows the X PRO 115A to be mounted on speaker stand.

TECHNICAL SPECIFICATIONS

GENERAL

Code		43722
Configuration	way	2
Low frequency woofer	inch	15 - 2.5 coil
High frequency driver	inch	1 - 1.4 coil

ACOUSTIC SPECIFICATIONS

Frequency response (@-6dB)	Hz	42 - 20k
MAX SPL (cont/peak)	dB	125 / 130
Dispersion	H° x V°	80 x 50 - rotatable horn

INPUTS & OUTPUTS

Input connectors		XLR IN/OUT, Jack ST
------------------	--	---------------------

POWER SUPPLY

AC power requirement	W	500
Power cord	mt	5
	ft	16.4

AMPLIFIER


Built-in amplifier max (LF/HF)	W	1200 / 300
Input impedance	Ohm	22k

MECHANICAL SPECIFICATIONS

Material	Cabinet	Plywood
	Grille	Steel
Net dimensions (WxHxD)	mm	436 x 735 x 440
	inch	17.16 x 28.93 x 17.32
Transport dimensions (WxHxD)	mm	535 x 795 x 535
	inch	21.06 x 31.34 x 21.06
Net weight	kg	21.80
	lb	48.06
Transport weight	kg	26.90
	lb	59.30




DIMENSIONAL DRAWING

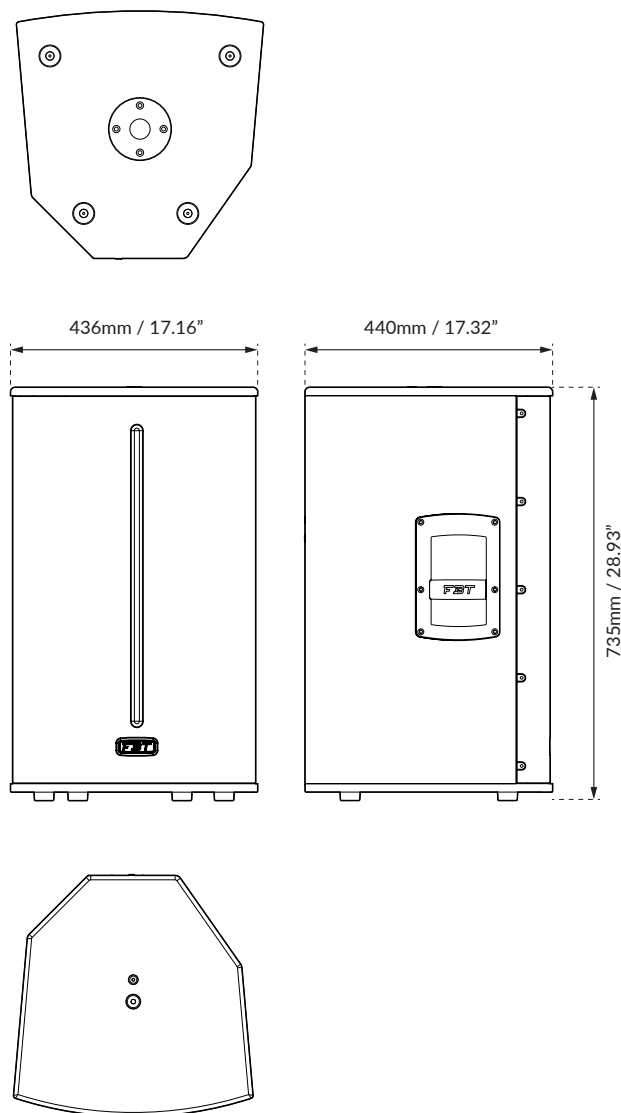

CONTROL PANEL



ACCESSORIES



XP-UH 15

Horizontal Wall Bracket

Code: 38894

730 x 70 x 321.5mm
28.74 x 2.75 x 12.65inch
2.40 kg / 5.29 lb