

Sound Projector


DESCRIPTION

These sound projectors, characterised by an ABS housing and steel front grille, are fitted with fireproof cable according to UNI 9795 2010 (length 80cm). The fixing system makes mounting easy and enables the speaker unit to be turned in the best direction. These speaker units have been developed specifically for use in emergency and evacuation systems and each has its own ceramic terminal strip and thermal fuse. These ensure the protection of the line connecting the loudspeakers if a fire puts one or more of the speaker units connected to it out of use.

TECHNICAL SPECIFICATIONS

Code		40956
Rated power	W (V)	40 (100)
Adjustable power	W	40 / 20 / 10
Sensitivity (@1W/1m)	dB	88
MAX SPL (@40W/1m)	dB	104
Frequency response	Hz	100 - 19k
Angle of dispersion (-6dB)	(500Hz)	220°
	(1kHz)	130°
	(2kHz)	90°
	(4kHz)	50°
Operating / Storage temperature	°C	-25 ÷ +55 / -40 ÷ 70
Relative humidity		<95%
Net dimensions (WxHxD)	mm	ø200 x 220
	inch	ø7.87 x 8.66
Net weight	kg	2.70
	lb	5.95

DIMENSIONAL DRAWING

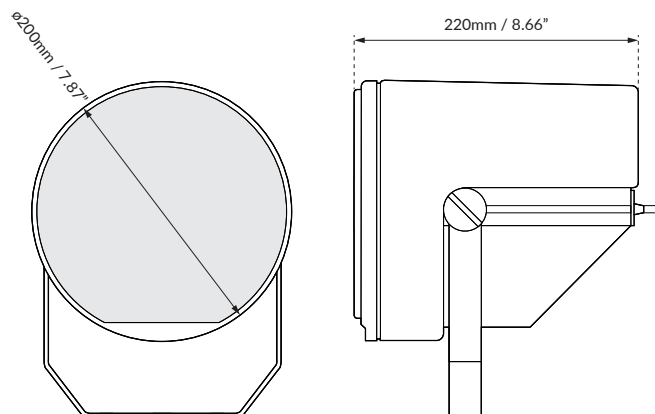

EN 54-24:2008

EN 54-24:2008
Cert. Nr. 0068-CPR-059/2016

Declaration of Performance (DoP)
available on the website: www.fbt.it

DIAGRAMS

